


NEENAH DRAINAGE GRATE R-4380
OR R-4385, D&L C-1012, OR
APPROVED EQUIVALENT

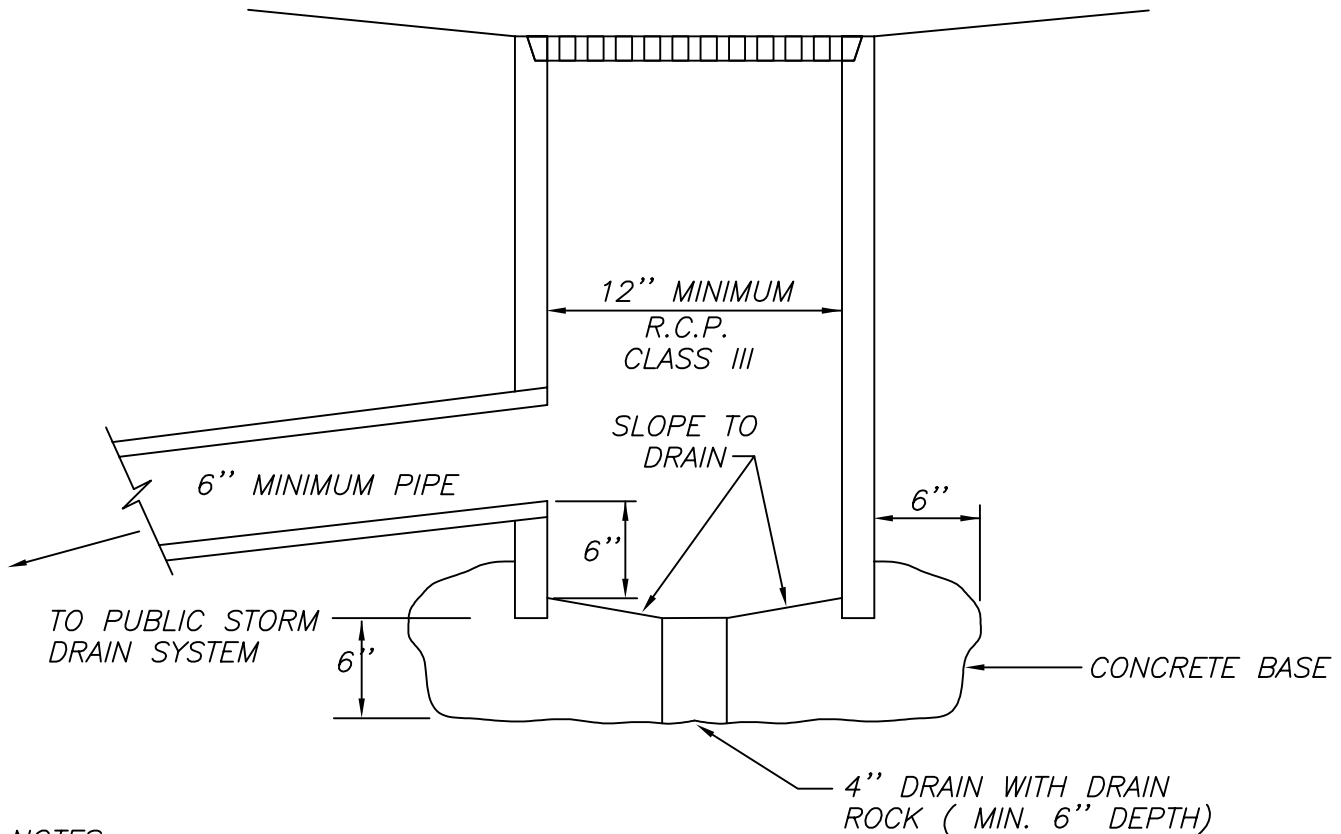

NOTES:

1. PORTLAND CEMENT CONCRETE (P.C.C.) SHALL HAVE THE FOLLOWING CHARACTERISTICS: 3000 PSI MIN. COMPRESSIVE STRENGTH AT 28 DAYS, MIN. 6 SACKS OF CEMENT PER CUBIC YARD WITH SLUMP AT 1 TO 4 INCHES. ALL MATERIAL SHALL CONFORM TO SSPWC, SECTION 202.
2. TO BE OWNED AND MAINTAINED BY PRIVATE DEVELOPMENTS ONLY. NOT TO BE USED IN DRIVEWAYS OR WHERE DRAINAGE ORIGINATES FROM AREAS USED FOR VEHICULAR TRAFFIC.
3. INSTALL GREASE TRAP PER STANDARD DETAIL DRAWING NO. R-213 (311).

NO.	REVISION	DATE	STANDARD DETAILS FOR PUBLIC WORKS CONSTRUCTION	SECTION	RENO
			YARD DRAIN	DRAWING NO.	R-203 (311)
				DATE	08/00
				PAGE	202
APPROVED BY	S.V.	08/00			